



Ø 420 AC AXIAL FAN 外转子轴流风机







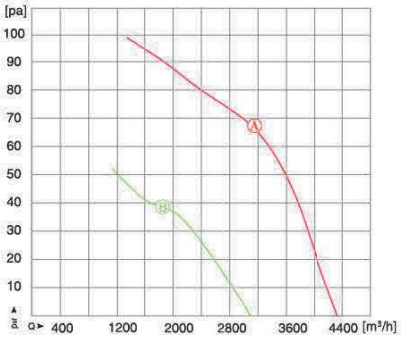

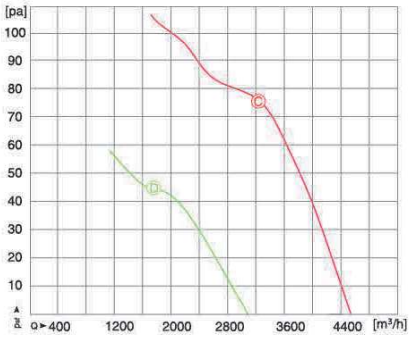

动压 / Dynamic pressure：$p_d=2.41x10^{-6}xQ^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF74L60P4-490N-420	1~220	50	8	Ⓐ	250	1341	1.11	67	-40~+80	21.48	32.0	68	
YDWF74L60P6-490N-420	1~220	50	6	Ⓑ	150	892	0.72	38	-40~+75	21.96	21.9	59	
YSWF74L60P4-490N-420	3~380	50	—	Ⓒ	251	1372	0.57	76	-40~+80	10.35	32.6	68	
YSWF74L60P6-490N-420	3~380	50	—	Ⓓ	155	910	0.51	45	-40~+75	9.68	21.1	59	


注：性能曲线在安装马尔导风圈时测得。Note :The performance curve is tested with MaEr wall plate.


MaEr Fan Motor
Professional · Honest · Human Oriented
info@yilida.com

Ø 450 AC AXIAL FAN 外转子轴流风机







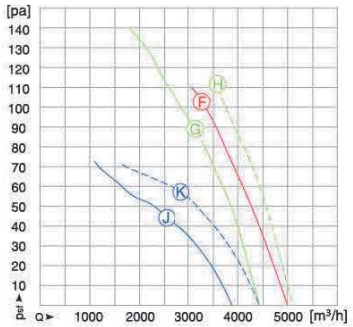

动压 / Dynamic pressure：$p_d=1.83x10^{-6}xQ^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF74L60P4-□-450	1~220	50	8	Ⓐ	249	1339	1.13	68	-40~+80	30.47	40.5	59	
YDWF74L60P4-□-450	1~220	50	8	Ⓑ	249	1362	1.14	86	-40~+80	30.03	40.1	58	
		60		Ⓒ	355	1424	1.61	85	-40~+80	22.78	31.8	59	
YDWF74L60P6-□-450	1~220	50	6	Ⓓ	149	891	0.70	36	-40~+70	19.21	30.7	50	
		60		Ⓔ	191	981	0.87	47	-40~+75	20.19	31.0	52	
YSWF74L60P4-□-450	3~380	50	—	Ⓕ	290	1328	0.59	103	-40~+70	32.36	42.0	59	
YSWF74L60P4-□-450	3~380	50	—	Ⓖ	240	1371	0.54	91	-40~+80	32.08	41.2	58	
		60		Ⓗ	344	1541	0.63	112	-40~+80	32.53	42.7	59	
YSWF74L60P6-□-450	3~380	50	—	Ⓙ	166	912	0.51	45	-40~+75	19.05	30.2	50	
		60		Ⓚ	210	1029	0.46	58	-40~+80	21.60	32.1	52	


注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.


Ø 450 AC AXIAL FAN 外转子轴流风机





叶轮材质：塑料
Impeller Material：Plastic

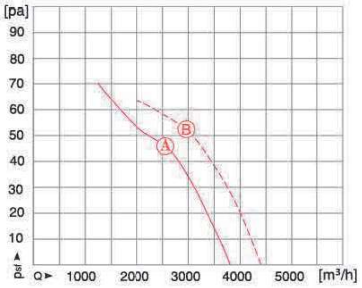

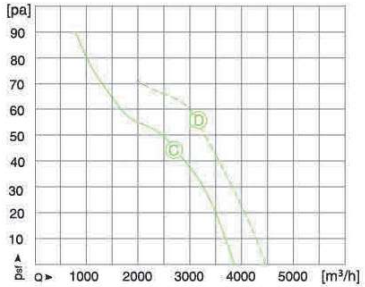

动压 / Dynamic pressure：$p_d=1.83x10^{-6}xQ^2(p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF74L60P6-□-450-PA	1~220	50	6	Ⓐ	152	889	0.70	47	-40~+70	21.53	33	58	
		60		Ⓑ	198	973	0.90	52	-40~+70	21.67	32.4	60	
YSWF74L60P6-□-450-PA	1~380	50	—	Ⓒ	160	912	0.46	45	-40~+75	21.06	32.3	58	
		60		Ⓓ	204	1026	0.45	56	-40~+80	23.72	34.3	60	


注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.


MaEr Fan Motor
Professional · Honest · Human Oriented

Ø 450 AC AXIAL FAN 外转子轴流风机





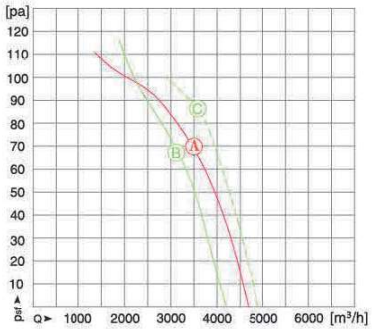

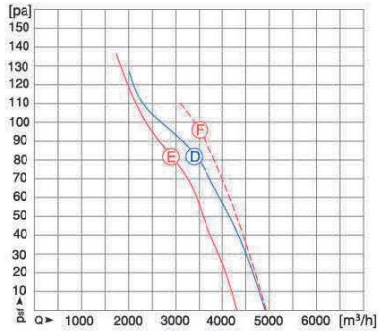

动压 / Dynamic pressure：$p_d=1.83x10^{-6}xQ^2(p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF74L60P4-□-450-4F	1~220	50	8	Ⓐ	258	1343	1.17	70	-40~+80	26.16	36.1	72	
YDWF74L60P4-□-450-4F	1~220	50	8	Ⓑ	225	1385	1.06	67	-40~+80	26.26	36.5	71	
		60		Ⓒ	315	1553	1.43	89	-40~+80	27.09	36.4	74	
YSWF74L60P4-□-450-4F	3~380	50	—	Ⓓ	278	1345	0.59	83	-40~+75	28.18	37.9	73	
YSWF74L60P4-□-450-4F	3~380	50	—	Ⓔ	224	1387	0.54	81	-40~+80	29.54	39.8	71	
		60		Ⓕ	311	1575	0.58	95	-40~+80	29.84	39.3	74	

注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.

MaEr Fan Motor Yilida info@yilida.com


Ø 450 AC AXIAL FAN 外转子轴流风机

□-522N

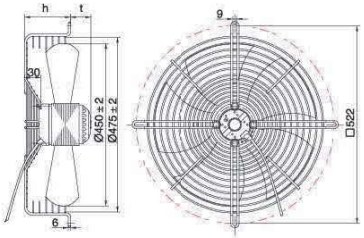


常规凹网罩 Concave grid 522N			低凹网罩 Low concave grid 522N50		
型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF74L60P4-522N-450	90	70	YD(S)WF74L60P4-522N50-450	50	110
YD(S)WF74L60P6-522N-450	90	70	YD(S)WF74L60P6-522N50-450	50	110

□-535H

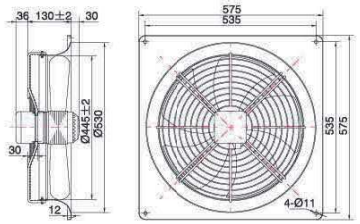

带导风圈 Wall plate 535H
型号 MODEL
YD(S)WF74L60P4-535H-450
YD(S)WF74L60P6-535H-450

□-495NG

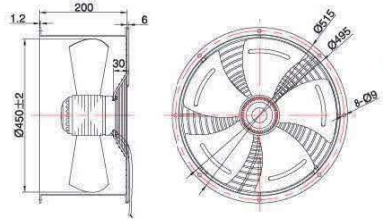

带风筒 Air duct 495NG
型号 MODEL
YD(S)WF74L60P4-495NG-450
YD(S)WF74L60P6-495NG-450

□-其他安装附件 Others

平网罩 Flat screen grid 522P			平板网罩 Flat net grid 522B			凹板网罩 Concave flat grid 522NB		
型号 MODEL	h	t	型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF74L60P4-522P-450	90	40	YD(S)WF74L60P4-522B-450	—	130	YD(S)WF74L60P4-522NB-450	—	160
YD(S)WF74L60P6-522P-450	90	40	YD(S)WF74L60P6-522B-450	—	130	YD(S)WF74L60P6-522NB-450	—	160


MaEr Fan Motor
Professional · Honest · Human Oriented


MaEr Fan Motor Yilida info@yilida.com

Ø 450 AC AXIAL FAN 外转子轴流风机





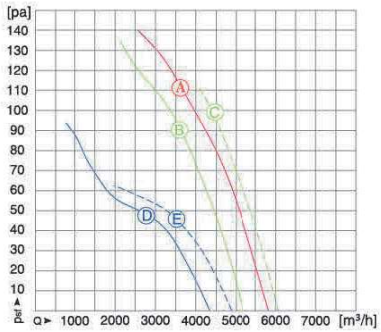

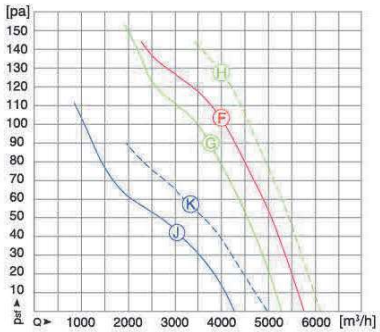

动压 / Dynamic pressure: $p_d=1.83x10^{-6}xQ^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF102L35P4-□-450	1~220	50	10	A	415	1354	1.81	113	-40~+80	27.19	36	71	
YDWF102L35P4-□-450	1~220	50	10	B	316	1386	1.44	91	-40~+85	29.18	38.5	69	
		60		C	482	1537	2.19	101	-40~+85	25.53	33.7	72	
YDWF102L35P6-□-450	1~220	50	3	D	188	903	0.86	49	-40~+85	19.19	30.1	64	
		60		E	251	999	1.17	45	-40~+85	17.87	28	66	
YSWF102L35P4-□-450	3~380	50	—	F	391	1365	0.78	103	-40~+85	29.12	38.1	70	
YSWF102L35P4-□-450	3~380	50	—	G	320	1392	0.68	91	-40~+85	29.46	38.8	69	
		60		H	490	1565	0.85	127	-40~+80	28.96	37.1	72	
YSWF102L35P6-□-450	3~380	50	—	J	191	933	0.51	41	-40~+80	18.74	29.5	64	
		60		K	269	1059	0.53	57	-40~+80	19.45	29.3	66	


注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.


MaEr Fan Motor Yilida info@yilida.com

Ø 450 AC AXIAL FAN 外转子轴流风机





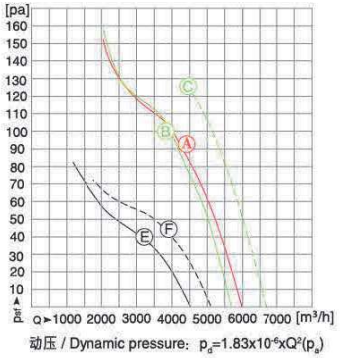

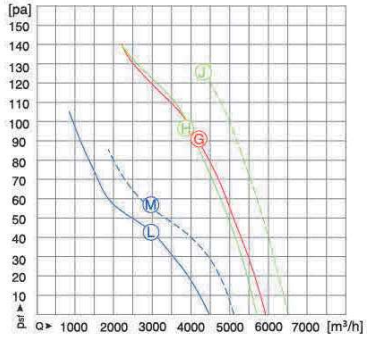

动压 / Dynamic pressure: $p_d=1.83x10^{-6}xQ^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF102L40P4-□-450	1~220	50	12	Ⓐ	421	1381	1.92	94	-40~+80	26.01	34.6	72	
YDWF102L40P4-□-450	1~220	50	12	Ⓑ	389	1430	1.70	103	-40~+80	28.60	37.5	71	
		60		Ⓒ	594	1566	2.60	128	-40~+80	26.39	34.1	74	
YDWF102L40P6-□-450	1~220	50	10	Ⓔ	212	912	0.97	41	-40~+80	16.62	27.1	65	
		60		Ⓕ	287	1020	1.35	45	-40~+70	16.47	26.1	66	
YSWF102L40P4-□-450	3~380	50	—	Ⓖ	400	1365	0.77	91	-40~+80	26.22	35	72	
YSWF102L40P4-□-450	3~380	50	—	Ⓗ	368	1381	0.75	94	-40~+80	28.55	37.6	71	
		60		Ⓙ	562	1546	0.96	126	-40~+75	26.92	34.8	74	
YSWF102L40P6-□-450	3~380	50	—	Ⓛ	200	930	0.54	43	-40~+80	17.84	28.4	65	
		60		Ⓜ	281	1062	0.57	58	-40~+80	18.85	28.5	66	

注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.


MaEr Fan Motor
Professional · Honest · Human Oriented


MaEr Fan Motor Yilida info@yilida.com

Ø 450 AC AXIAL FAN 外转子轴流风机





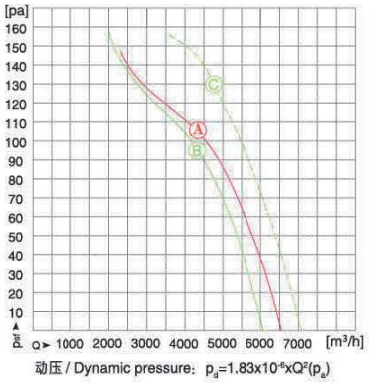

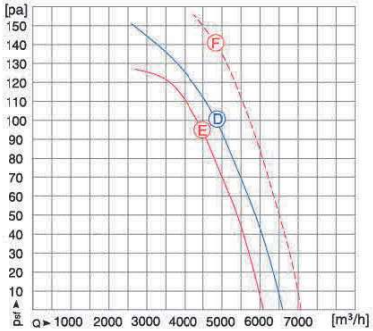


动压 / Dynamic pressure: $p_d=1.83x10^{-6}xQ^2(p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF102L45P4-□-450	1~220	50	16	Ⓐ	521	1387	2.36	108	-40~+80	24.03	32	73	
YDWF102L45P4-□-450	1~220	50	16	Ⓑ	438	1412	2.00	97	-40~+85	26.67	35.1	71	
		60		Ⓒ	676	1600	3.09	130	-40~+80	25.33	32.6	74	
YSWF102L45P4-□-450	3~380	50	—	Ⓓ	498	1404	1.11	102	-40~+80	27.3	35.6	73	
YSWF102L45P4-□-450	3~380	50	—	Ⓔ	433	1419	1.00	96	-40~+85	27.41	35.9	71	
		60		Ⓕ	667	1627	1.18	141	-40~+80	28.00	35.3	74	


注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.

Ø 450 AC AXIAL FAN 外转子轴流风机





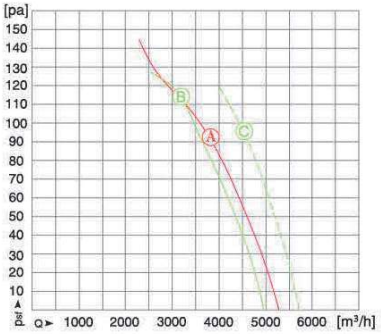



动压 / Dynamic pressure: $p_d=1.83x10^{-6}xQ^2(p_a)$

型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF102L35P4-□-450-4F	1~220	50	10	A	367	1359	1.67	94	-40~+80	26.69	35.6	73	
YDWF102L35P4-□-450-4F	1~220	50	10	B	323	1384	1.48	114	-40~+85	31.21	40.5	72	
		60		C	423	1602	1.93	94	-40~+85	27.98	36.5	74	
YSWF102L35P4-□-450-4F	3~380	50	—	D	371	1372	0.74	102	-40~+80	28.02	36.9	73	
YSWF102L35P4-□-450-4F	3~380	50	—	E	319	1397	0.70	106	-40~+85	31.20	40.5	72	
		60		F	467	1591	0.82	129	-40~+85	30.70	39.0	75	


注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.


MaEr Fan Motor
Professional · Honest · Human Oriented

Ø 450 AC AXIAL FAN 外转子轴流风机





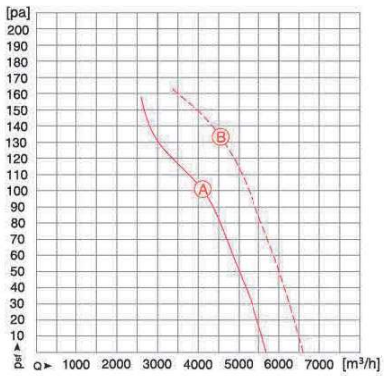

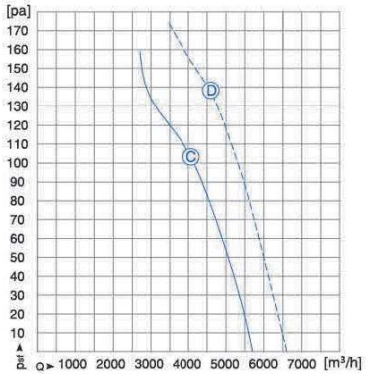

动压 / Dynamic pressure: $p_d=1.83x10^{-6}xQ^2(p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF102L45P4-□-450-4F	1~220	50	16	A	435	1409	2.00	100	-40~+85	26.27	34.8	74	
		60		B	653	1614	3.00	132	-40~+80	25.72	33.1	76	
YSWF102L45P4-□-450-4F	3~380	50	—	C	428	1413	1.04	104	-40~+85	27.30	35.8	74	
		60		D	653	1620	1.18	137	-40~+80	26.82	34.2	76	


注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.

Ø 450 AC AXIAL FAN 外转子轴流风机





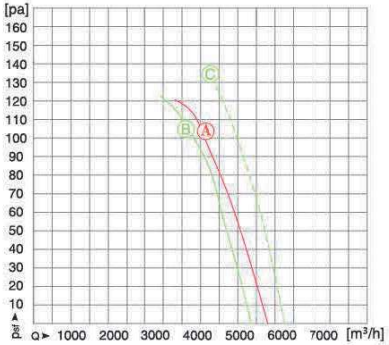

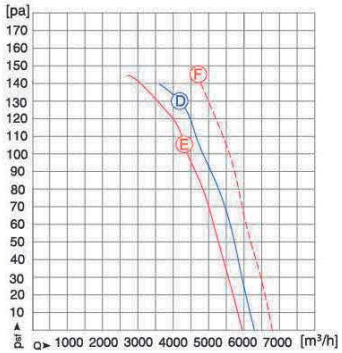

动压 / Dynamic pressure：$p_d=1.83x10^{-6}xQ^2(p_a)$


型号 Model	电压 Voltage	频率 Frequency	电容器 Capacitor	曲线 Curve	输入功率 Power	转速 RPM	电流 Current	静压 Psf	环境温度 Temp.	静压效率 ηsf	能效值 EFF.Grade	噪声 Noise	备注 Note
	V	Hz	μF/450V	NO.	W	r/min	A	Pa	℃	%	N	dB/(A)	
YDWF102L45P4-□-450-7	1~220	50	16	Ⓐ	499	1387	2.28	103	-40~+80	26.06	34.2	72	
YDWF102L45P4-□-450-7	1~220	50	16	Ⓑ	441	1405	2.02	104	-40~+85	27.53	36.0	71	
		60		Ⓒ	682	1587	3.11	137	-40~+80	26.08	33.4	74	
YSWF102L45P4-□-450-7	3~380	50	—	Ⓓ	497	1404	1.09	130	-40~+80	30.23	38.5	72	
YSWF102L45P4-□-450-7	3~380	50	—	Ⓔ	438	1414	1.05	105	-40~+85	28.57	37.1	71	
		60		Ⓕ	665	1618	1.20	145	-40~+80	28.47	35.8	74	

注：性能曲线在安装马尔导风圈时测得。Note: The performance curve is tested with MaEr wall plate.

MaEr Fan Motor
Professional · Honest · Human Oriented


Ø 450 INSTALLATION ACCESSORIES 安装附件

□-522N

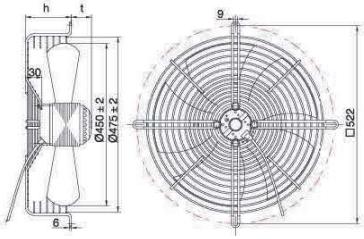


常规凹网罩 Concave grid 522N			低凹网罩 Low concave grid 522N35		
型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF102L35P4-522N-450	90	47	YD(S)WF102L35P4-522N35-450	35	102
YD(S)WF102L35P6-522N-450	90	47	YD(S)WF102L35P6-522N35-450	35	102
YD(S)WF102L40P4-522N-450	90	52	YD(S)WF102L40P4-522N35-450	35	107
YD(S)WF102L40P6-522N-450	90	52	YD(S)WF102L40P6-522N35-450	35	107
YD(S)WF102L45P4-522N-450	90	57	YD(S)WF102L45P4-522N35-450	35	112
YD(S)WF102L45P6-522N-450	90	57	YD(S)WF102L45P6-522N35-450	35	112

□-535H

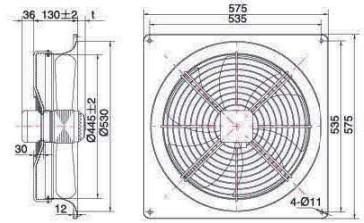

带导风圈 Wall plate 535H	
型号 MODEL	t
YD(S)WF102L35P4-535H-450	7
YD(S)WF102L35P6-535H-450	7
YD(S)WF102L40P4-535H-450	12
YD(S)WF102L40P6-535H-450	12
YD(S)WF102L45P4-535H-450	17
YD(S)WF102L45P6-535H-450	17

□-495NG

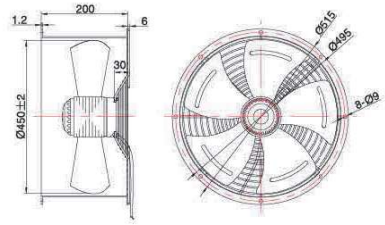

带风筒 Air duct 495NG
型号 MODEL
YD(S)WF102L35P4-495NG-450
YD(S)WF102L35P6-495NG-450
YD(S)WF102L40P4-495NG-450
YD(S)WF102L40P6-495NG-450
YD(S)WF102L45P4-495NG-450
YD(S)WF102L45P6-495NG-450

□-其他安装附件 Others

平板网罩 Flat screen grid 522B			凹板网罩 Concave flat grid 522NB		
型号 MODEL	h	t	型号 MODEL	h	t
YD(S)WF102L35P4-522B-450	—	107	YD(S)WF102L35P4-522NB-450	—	137
YD(S)WF102L35P6-522B-450	—	107	YD(S)WF102L35P6-522NB-450	—	137
YD(S)WF102L40P4-522B-450	—	112	YD(S)WF102L40P4-522NB-450	—	142
YD(S)WF102L40P6-522B-450	—	112	YD(S)WF102L40P6-522NB-450	—	142
YD(S)WF102L45P4-522B-450	—	117	YD(S)WF102L45P4-522NB-450	—	147
YD(S)WF102L45P6-522B-450	—	117	YD(S)WF102L45P6-522NB-450	—	147